AC Surge Protector SPD POWER VANTAGE Module 480 Vac MOV, UL 1449 4th Ed.




## B93-00-0073
LEA 480V Module

### Features

- Replacement Module for POWER VANTAGE Series

### Applications

- Electrical Panelboards
- Industrial Automation
- Communications Base Stations
- IT & Data Centers
- Switchgear
- Motor Control Centers
- Automatic Transfer Switches
- Wastewater Treatment
- Oil & Gas
- LED Lighting
- Schools
- Hospitals

### Description

AC surge protector (also known as SPD or lightning protector) B93-00-0073 from Transtector is a UL1449 4th Ed. module style SPD that utilizes state of the art MOV technology to protect critical equipment that operates on a 480 Vac electrical service. This surge protector provides effective protection against electrical transient surges that are generated both by external lightning events and by internal switching events and supports long-term system reliability by safely shunting high amounts of transient energy while maintaining a very low clamping voltage. Transtector AC surge protectors are available in stock with same day shipping.

### Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|---|---|---|---|---|
| Service Voltages | | 480 | | Vac |
| Maximum Continuous Operating Voltage (MCOV) | | | | |
| L - L | | | 508 | Vac |

### Surge Protection Specification

| Description | Minimum | Typical | Maximum | Units |
|---|---|---|---|---|
| Surge Protection Technology | | MOV | | |
| Protection Modes | | L-L | | |
| Nominal Discharge Current Rating (In) | | 20 | | kA |
| Response Time | | | 25 | ns |

Click the following link (or enter part number in “SEARCH” on website) to obtain additional part information including price, inventory and certifications:
AC Surge Protector SPD POWER VANTAGE Module 480 Vac MOV, UL 1449 4th Ed. B93-00-0073


B93-00-0073 REV 1.0 | © 2019 Transtector, Inc., All Rights Reserved.

AC Surge Protector SPD POWER VANTAGE Module 480 Vac MOV, UL 1449 4th Ed.




## B93-00-0073

LEA 480V Module

---

### Mechanical Specifications

**Size**

| | | |
|---|---|---|
| Height | 4.55 in | [115.57 mm] |
| Width | 0.75 in | [19.05 mm] |
| Depth | 3.88 in | [98.55 mm] |
| Weight | 0.5 lbs | [226.8 g] |
| Housing Material and Plating | Noryl N190X | |

### Environmental Specifications

| | |
|---|---|
| Temperature Range (Operational) | -40 to +75 deg C |
| Humidity | 100% non-condensing |

### Installation

| | |
|---|---|
| Mount Type | Panel |

### Compliance Certifications

| | |
|---|---|
| UL Compliant | Yes |
| Certifications | UL 1449 4th Ed. |

Transtector Systems specializes in protection of highly sensitive, low voltage equipment through its patented, non-degrading silicon diode technology and custom filters. Our power quality expertise translates into a diverse product offering including AC, DC, and signal applications as well as integrated cabinets, power distribution panels and EMP hardened devices.

Click the following link (or enter part number in “SEARCH” on website) to obtain additional part information including price, inventory and certifications: AC Surge Protector SPD POWER VANTAGE Module 480 Vac MOV, UL 1449 4th Ed. B93-00-0073

URL: https://www.transtector.com/ac-surge-protector-spd-power-vantage-module-b93-00-0073-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Transtector reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Transtector does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Transtector does not assume any liability arising out of the use of any part or documentation.





B93-00-0073 REV 1.0 | © 2019 Transtector, Inc., All Rights Reserved.


## B93-00-0073 CAD Drawing

REVISIONS

| REV. | DESCRIPTION | DATE | APPROVED |
|---|---|---|---|
| A | INITIAL RELEASE | 1/22/19 | DWR |

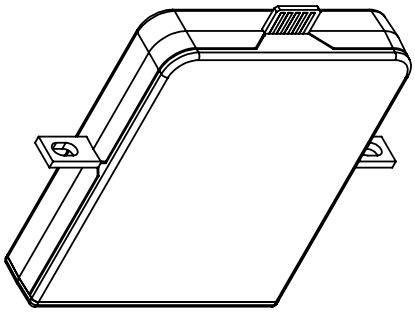

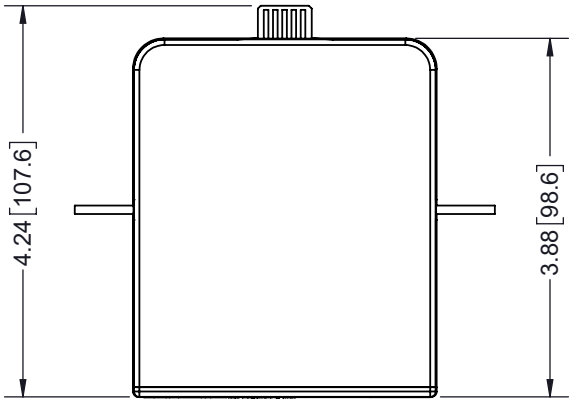

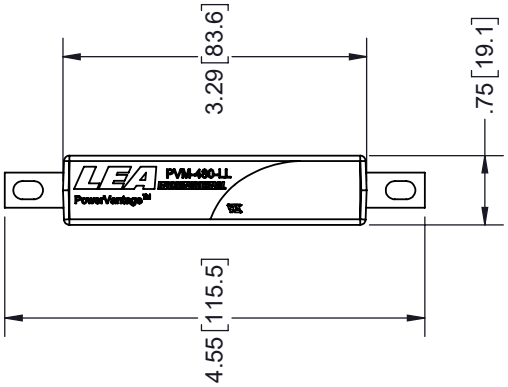
THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF TRANSTECTOR CORPORATION. ALL RIGHTS RESERVED.

SHEET 1 OF 1

SCALE 1:2

REV A

TRANSTECTOR

10701 AIRPORT ROAD, HAYDEN, ID. 83835
PHONE: 1.208.635.6400 | 1.800.882.9110
FAX: 1.208.955.2041
www.transtector.com | e-mail: sales@transtector.com

SIZE A | CAGE 30992 | DRAWN BY DPM | PART NUMBER B93-00-0073

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [ ] ARE MILLIMETERS

TOLERANCES:
X=± .2 [5.08] | FRACTIONS ± 1/32
.XX=± .01 [.25] | ANGLES ± 1°
.XXX=± .005 [.13]

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

THIRD-ANGLE PROJECTION

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

T-Rev A



B93-00-0073 REV 1.0 | © 2019 Transtector, Inc., All Rights Reserved.